



Containers Marítimos

www.areadepymes.com



1

Normal 20 pies

Pesos Vacío	2.210 - 2.400 Kg (4.875 - 5.290 libras)			
Máximo	21.700 - 28.240 Kg (47.850 - 62.270 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	6.058 mm (20')	5.900 mm (19' 4")	-----
	Ancho	2.438 mm (8')	2.345 mm (7' 8")	2.335 mm (7' 8")
Alto	2.591 mm (8' 6")	2.400 mm (7' 10")	2.290 mm (7' 6")	
Volumen	33,3 m ³ (1.175 pies ³)			



Normal 40 pies

Pesos Vacío	3.630 - 3.740 Kg (8.005 - 8.245 libras)			
Máximo	26.740 - 26.850 Kg (58.960 - 59.205 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	12.192 mm (40')	12.030 mm (39' 6")	-----
	Ancho	2.438 mm (8')	2.345 mm (7' 8")	2.335 mm (7' 8")
Alto	2.591 mm (8' 6")	2.400 mm (7' 10")	2.290 mm (7' 6")	
Volumen	67,7 m ³ (2.390 pies ³)			



Normal 40 pies "High Cube"


Pesos Vacío	3.880 - 3.900 Kg (8.555 - 8.600 libras)			
Máximo	26.580 - 26.600 Kg (58.610 - 58.655 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	12.192 mm (40')	12.030 mm (39' 6")	-----
	Ancho	2.438 mm (8')	2.350 mm (7' 8")	2.335 mm (7' 8")
Alto	2.896 mm (9' 6")	2.710 mm (8' 11")	2.595 mm (8' 6")	
Volumen	76,5 m ³ (2.700 pies ³)			



2


Abierto 20 pies "Flat Rack"

Pesos Vacío	2.350 - 2.500 Kg (4.760 - 5.510 libras)			
Máximo	17.850 - 30.150 Kg (39.360 - 66.480 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	6.058 mm (20')	5.900 mm (19' 4")	5.530 - 5.700 mm (18' 2" - 18' 8")
	Ancho	2.438 mm (8')	2.400 mm (7' 10")	2.230 - 2.250 mm (7' 4" - 7' 5")
Alto	2.591 mm (8' 6")	2.270 - 2.285 mm (7' 5" - 7' 6")	2.270 - 2.285 mm (7' 5" - 7' 6")	
Volumen	-----			

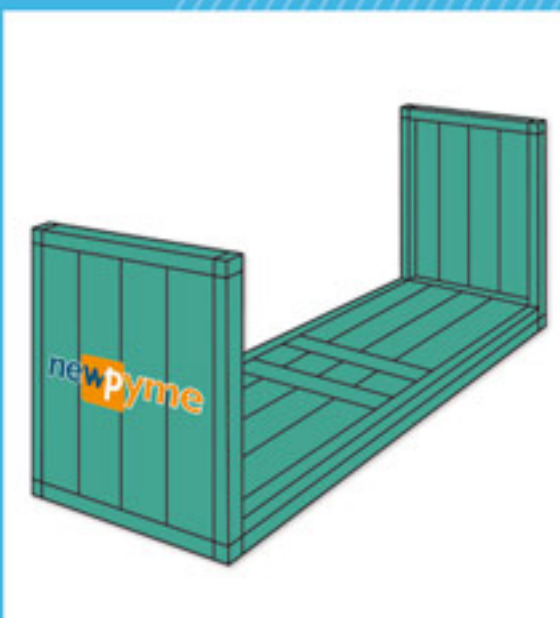

Abierto 40 pies "Flat Rack"

Pesos Vacío	4.900 Kg (10.805 libras)			
Máximo	40.100 Kg (88.420 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	12.192 mm (40')	12.150 mm (39' 10")	11.835 mm (38' 10")
	Ancho	2.438 mm (8')	2.400 mm (7' 10")	2.230 mm (7' 4")
Alto	2.591 mm (8' 6")	2.035 mm (6' 8")	2.035 mm (6' 8")	
Volumen	-----			

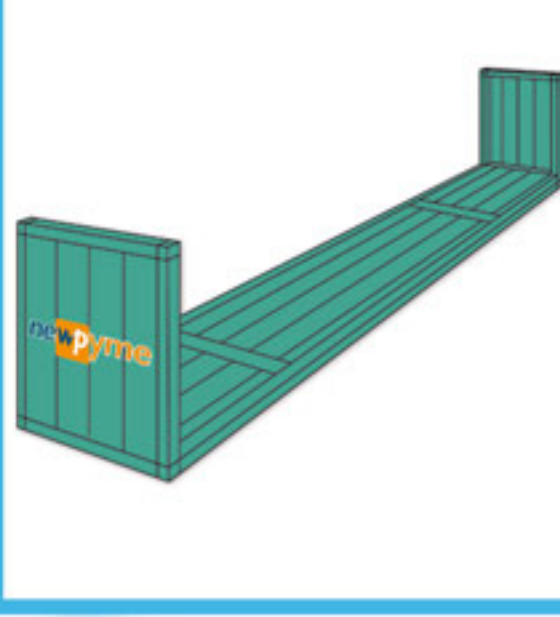

3

Destapado 20 pies "Open Top"

Pesos Vacío	2.230 - 2.250 Kg (4.915 - 4.960 libras)			
Máximo	21.770 - 28.230 Kg (48.005 - 62.245 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	6.058 mm (20')	5.900 mm (19' 4")	-----
	Ancho	2.438 mm (8')	2.330 mm (7' 8")	2.330 mm (7' 8")
Alto	2.591 mm (8' 6")	2.380 mm (6' 8")	2.220 mm (7' 3")	
Volumen	31,8 m ³ (1.125 pies ³)			
Abertura superior	5.740 mm (18' 10") x 2.190 mm (7' 2")			



Destapado 40 pies "Open Top"

Pesos Vacío	3.650 Kg (8.050 libras)			
Máximo	26.830 Kg (59.160 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	12.192 mm (40')	12.045 mm (39' 6")	-----
	Ancho	2.438 mm (8')	2.340 mm (7' 8")	2.335 mm (7' 8")
Alto	2.591 mm (8' 6")	2.380 mm (6' 8")	2.290 mm (7' 6")	
Volumen	67,1 m ³ (2.370 pies ³)			
Abertura superior	11.890 mm (39') x 2.185 mm (7' 2")			



4

Refrigerado 20 pies

-25 / +25 °C				
Pesos Vacío	2.850 - 3.500 Kg (6.285 - 7.715 libras)			
Máximo	17.090 - 27.280 Kg (37.685 - 60.150 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	6.058 mm (20')	5.480 - 5.500 mm (17' 11" - 18')	-----
	Ancho	2.438 mm (8')	2.230 - 2.285 mm (7' 4" - 7' 6")	2.165 - 2.285 mm (7' 1" - 7' 6")
Alto	2.591 mm (8' 6")	2.135 - 2.255 mm (7' - 7' 5")	2.160 - 2.210 mm (7' - 7' 3")	
Volumen	26,2 - 28,3 m ³ (925 - 1.000 pies ³)			
Voltaje Trifásico	180/200V y 380/440V, 50/60 Hz			



Refrigerado 40 pies

-25 / +25 °C				
Pesos Vacío	4.500 - 5.400 Kg (9.920 - 11.905 libras)			
Máximo	25.080 - 25.980 Kg (55.300 - 57.285 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	12.192 mm (40')	11.235 - 11.575 mm (36' 10" - 38')	-----
	Ancho	2.438 mm (8')	2.240 - 2.285 mm (7' 4" - 7' 5")	2.240 - 2.280 mm (7' 4" - 7' 6")
Alto	2.591 mm (8' 6")	2.175 - 2.250 mm (7' 2" - 7' 5")	2.200 mm (7' 3")	
Volumen	57,5 - 58,7 m ³ (2.030 - 2.075 pies ³)			
Voltaje Trifásico	380/440V, 50/60 Hz			



Refrigerado 40 pies "High Cube"

-25 / +25 °C				
Pesos Vacío	4.700 - 5.200 Kg (10.365 - 11.465 libras)			
Máximo	25.780 - 29.250 Kg (56.845 - 64.495 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	12.192 mm (40')	11.575 mm (38')	-----
	Ancho	2.438 mm (8')	2.280 - 2.290 mm (7' 6")	2.280 - 2.290 mm (7' 6")
Alto	2.895 mm (9' 6")	2.525 - 2.550 mm (8' 3" - 8' 4")	2.435 mm (8')	
Volumen	66,7 - 68 m ³ (2.355 - 2.400 pies ³)			
Voltaje Trifásico	380/440V, 50/60 Hz			



5

Ventilado 20 pies

Dos aberturas arriba y abajo de 5.000 y 2.500 cm ² (5,40 y 2,70 pies ²)				
Pesos Vacío	2.160 - 2.780 Kg (4.765 - 6.130 libras)			
Máximo	21.350 - 27.000 Kg (47.075 - 59.535 libras)			
Medidas	Externo	Interno	Puertas abiertas	
	Largo	6.058 mm (20')	5.885 - 5.935 mm (19' 4" - 19' 6")	-----
	Ancho	2.438 mm (8')	2.330 - 2.370 mm (7' 8" - 7' 9")	2.285 - 2.335 mm (7' 6" - 7' 8")
Alto	2.591 mm (8' 6")	2.375 - 2.410 mm (7' 9" - 7' 11")	2.260 - 2.290 mm (7' 5" - 7' 6")	
Volumen	32,2 - 33,8 m ³ (1.135 - 1.195 pies ³)			



Síguenos en Facebook
www.facebook.com/AreaDePymes

Infografía realizada por Newpyme para el entorno Área de Pymes